


SNOW

Tapping Attachment Number 1

Design features combine extreme sensitivity with rigidity, ruggedness and dependability...

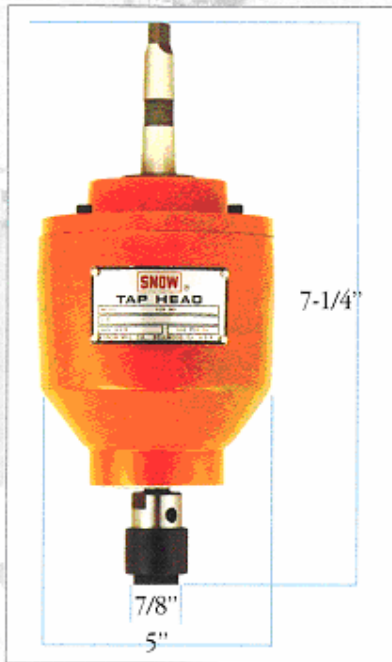

| | |
|------------------------|---------------------------------|
| Capacity in 1020 Steel | No. 0 thru 1/4" |
| Collets available | No. 0-6, 8, 10, No. 12 and 1/4" |
| Straight Shank | 1/2" |
| Taper or Adapter | |
| Quill Clamp | No. 1MT, 2MT, 3MT, Quill Clamp |
| Overall Length | Less shank or adapter 6" |
| Spindle Nose Thread | 3/4" - 24 |
| Maximum Speed | 3600 RPM |
| Net Shipping Weight | 9 Lbs. |
| Optional Tap Spindle | Available for: |
| | Jacobs Rubber-Flex collet |
| | T.M. Smith Quick Change Collet |
| | Bilz Quick Change Collet |

SNOW No. 1 Tapping Attachment

SPECIFICATIONS

One tap collet of your choice and one set of wrenches are included with each Tapping Attachment. Please specify the size of collet required. Additional collets available from stock.

| Catalog No. | Description |
|-------------|---|
| SNOW 10019 | A15 Drill Press Tap Head with 1/2" Straight Shank |
| SNOW 10009 | A11 Drill Press Tap Head with No. 2 Morse Taper |
| SNOW 10018 | A12 Drill Press Tap Head with No. 1 Morse Taper |
| SNOW 10001 | Quill Clamp, Specify the make and model number of the drill press |



COLLETS For No. 1 Tapping Attachment

SPECIFICATIONS

| Capacity | Shank Diameter | Square Size | Part No. |
|----------|----------------|-------------|----------|
| 0-6 | .141 | - | 728AJ |
| 8 | .168 | .131 | 728AK |
| 10 | .194 | .152 | 728AL |
| 12 | .220 | .165 | 728AM |
| 1/4" | .250 | .191 | 728AN |



Tapping Attachment Number 2

Design features the straight line of distribution load...

| | |
|------------------------|--------------------------------|
| Capacity in 1020 Steel | No. 6 thru 3/8" |
| Collets available | No. 12, 1/4", 5/16" & 3/8" |
| Straight Shank | 1/2" |
| Taper or Adapter | |
| Quill Clamp | No. 2MT, 3MT, Quill Clamp |
| Overall Length | Less shank or adapter 7" |
| Spindle Nose Thread | 1" - 20 |
| Maximum Speed | 2500 RPM |
| Net Shipping Weight | 11 Lbs. |
| Optional Tap Spindle | Available for: |
| | Jacobs Rubber-Flex collet |
| | T.M. Smith Quick Change Collet |
| | Bilz Quick Change Collet |

SNOW No. 2 Tapping Attachment

SPECIFICATIONS

One tap collet of your choice and one set of wrenches are included with each Tapping Attachment. Please specify the size of collet required. Additional collets available from stock.

| Catalog No. | Description |
|-------------|---|
| SNOW 10046 | A25 Drill Press Tap Head with 1/2" Straight Shank |
| SNOW 10028 | A21 Drill Press Tap Head with No. 1 Morse Taper |
| SNOW 10029 | A22 Drill Press Tap Head with No. 2 Morse Taper |
| SNOW 10045 | A23 Drill Press Tap Head with No. 3 Morse Taper |
| SNOW 10002 | Quill Clamp, Specify the make and model number of the drill press |

COLLETS For No. 2 Tapping Attachment


| SPECIFICATIONS | | | |
|----------------|----------------|-------------|----------|
| Capacity | Shank Diameter | Square Size | Part No. |
| 0-6 | .141 | - | 628AR |
| 8 | .168 | .131 | 628AZ |
| 10 | .194 | .152 | 628AL |
| 12 | .220 | .165 | 628AM |
| 1/4" | .255 | .191 | 628AN |
| 5/16" | .318 | .238 | 628AS |
| 3/8" | .381 | .286 | 628AW |



SNOW

Tapping Attachment Number 3

Design features the use of eight single and double row ball bearings...

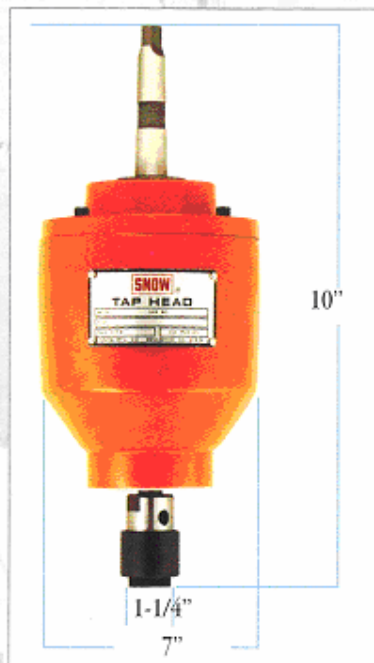

| | |
|------------------------|---|
| Capacity in 1020 Steel | No. 10 thru 1/2" |
| Collets available | No. 0-6, 8, 10, 12, 1/4", 5/16", 3/8", 7/16", 1/2", 1/8" small pipe shank |
| Straight Shank | 3/4" |
| Taper or Adapter | |
| Quill Clamp | No. 2MT, 3MT, 4MT Quill Clamp |
| Overall Length | Less shank or adapter 8-1/4" |
| Spindle Nose Thread | 1" - 20 |
| Maximum Speed | 1800 RPM |
| Net Shipping Weight | 15 Lbs. |
| Optional Tap Spindle | Available for: Jacobs Rubber-Flex collet T.M. Smith Quick Change Collet Bilz Quick Change Collet |



SNOW No. 3 Tapping Attachment

SPECIFICATIONS


One tap collet of your choice and one set of wrenches are included with each Tapping Attachment. Please specify the size of collet required. Additional collets available from stock.

| Catalog No. | Description |
|-------------|---|
| SNOW 10048 | A35 Drill Press Tap Head with 3/4" Straight Shank |
| SNOW 10039 | A32 Drill Press Tap Head with No. 2 Morse Taper |
| SNOW 10047 | A33 Drill Press Tap Head with No. 3 Morse Taper |
| SNOW 10003 | Quill Clamp, Specify the make and model number of the drill press |

COLLETS For No. 3 Tapping Attachment

SPECIFICATIONS

| Shank Capacity | Square Diameter | Part Size | No. |
|----------------|-----------------|-----------|--------|
| 0-6 | .141 | - | 628AR |
| 8 | .168 | .131 | 628AZ |
| 10 | .194 | .152 | 628AL |
| 12 | .220 | .165 | 628AM |
| 1/4" | .255 | .181 | 628AN |
| 5/16" | .318 | .238 | 628AS |
| 3/8" | .381 | .286 | 628AW |
| 7/16" | .323 | .242 | 628AW |
| 1/2" | .367 | .275 | 628AX |
| 1/8" Pipe | .312 | .254 | 628AK |
| Small Shank | | | |
| 1/8" Pipe | .437 | .328 | 628AKI |
| Large Shank | | | |



Tapping Attachment Number 4

| | |
|------------------------|---|
| Capacity in 1020 Steel | 1/4" thru 3/4" NF |
| Collets available | 1/4", 5/16", 3/8", 7/16", 1/2", 9/16", 5/8", 11/16", 3/4", 1/8" small pipe shank, 1/8" large pipe shank, 1/4" pipe |
| Taper or Adapter | |
| Quill Clamp | No. 3MT, 4MT, Quill Clamp |
| Overall Length | Less shank or adapter 10" |
| Spindle Nose Thread | 1-1/2" - 20 |
| Maximum Speed | 1100 RPM |
| Net Shipping Weight | 23 Lbs. |
| Optional Tap Spindle | Available for: Jacobs Rubber-Flex collet T.M. Smith Quick Change Collet Bilz Quick Change Collet |

SNOW No. 4 Tapping Attachment

SPECIFICATIONS

One tap collet of your choice and one set of wrenches are included with each Tapping Attachment. Please specify the size of collet required. Additional collets available from stock.

| Catalog No. | Description |
|-------------|---|
| SNOW 10007 | A43 Drill Press Tap Head with No. 3 Morse Taper* |
| SNOW 10008 | A44 Drill Press Tap Head with No. 4 Morse Taper* |
| SNOW 10049 | A45 Drill Press Tap Head with No. 5 Morse Taper* |
| SNOW 10004 | Quill Clamp, Specify the make and model number of the drill press |

*Recommend Morse Taper be pinned to spindle

COLLETS For No. 4 Tapping Attachment

SPECIFICATIONS

| Shank Capacity | Square Diameter | Part Size | No. |
|-----------------------|-----------------|-----------|--------|
| 1/4" | .255 | .191 | 655AZ |
| 5/16" | .328 | .238 | 655AP |
| 3/8" | .381 | .286 | 655AL |
| 7/16" | .323 | .242 | 628AM |
| 1/2" | .367 | .275 | 655AN |
| 1/8" Pipe Small Shank | .312 | .234 | 655AK |
| 1/8" Pipe Large Shank | .437 | .328 | 655AKI |
| 9/16" Pipe | .429 | .322 | 655AS |
| 5/8" | .480 | .360 | 655AT |
| 11/16" | .542 | .406 | 655AX |
| 3/4" | .590 | .442 | 655AW |
| 1/4" Pipe | .562 | .421 | 655AR |

